

10 - 50 MHz Channel Link III Serializer and Deserializer with Embedded Bi-Directional Control Channel

General Description

The DS92LX2121/DS92LX2122 chipset offers a Channel Link III interface to deliver clock, high-speed data and a low-speed, bidirectional I²C control bus over a single twisted wire pair. This single serial stream simplifies transferring a wide data bus over PCB traces and cable by eliminating clock to data skew, while reducing cable width and connector size. The DS92LX2121/DS92LX2122 incorporates differential signaling on both the high-speed and bi-directional back channel control data paths.

The Serializer/ Deserializer pair is ideally suited for driving video data with up to 18-bit color depth (RGB666 + HS, VS, and DE) along with a bi-directional back channel control bus.

In addition, the Deserializer provides input equalization to compensate for loss from the media over longer distances. Internal DC balanced encoding/decoding is used to support AC-Coupled interconnects. Deserializer features such as output slew rate control, spread spectrum clock generation and staggered outputs can be enabled to lower EMI.

A sleep function provides a power-savings mode when the high speed forward channel and embedded bi-directional control channel are not needed.

The Serializer is offered in a 40-pin lead in LLP and Deserializer is offered in a 48-pin LLP packages.


Features

- Up to 1050 Mbts/sec data throughput
- 10 MHz to 50 MHz input clock support
- Supports 18-bit color depth (RGB666 + HS, VS, DE)
- Embedded clock with DC Balanced coding to support AC-coupled interconnects
- Capable to drive up to 10 meters shielded twisted-pair
- Bi-directional control interface channel with I²C support
- I²C interface for device configuration. Single-pin ID addressing
- Up to 4 GPI on DES and GPO on SER
- AT-SPEED BIST diagnosis feature to validate link integrity
- Individual power-down controls for both SER and DES
- User-selectable clock edge for parallel data on both SER and DES
- Integrated termination resistors
- 1.8V- or 3.3V-compatible parallel bus interface
- Single power supply at 1.8V
- IEC 61000-4-2 ESD compliant
- Temperature range -40°C to +85°C
- No reference clock required on Deserializer
- Programmable Receive Equalization
- LOCK output reporting pin to ensure
- EMI/EMC Mitigation
 - DES Programmable Spread Spectrum (SSCG) outputs
 - DES Receiver Output clock and data slew rate select
 - DES Receiver staggered outputs

Applications


- Industrial Displays, Touch Screens
- Medical Imaging

Typical Application Diagram

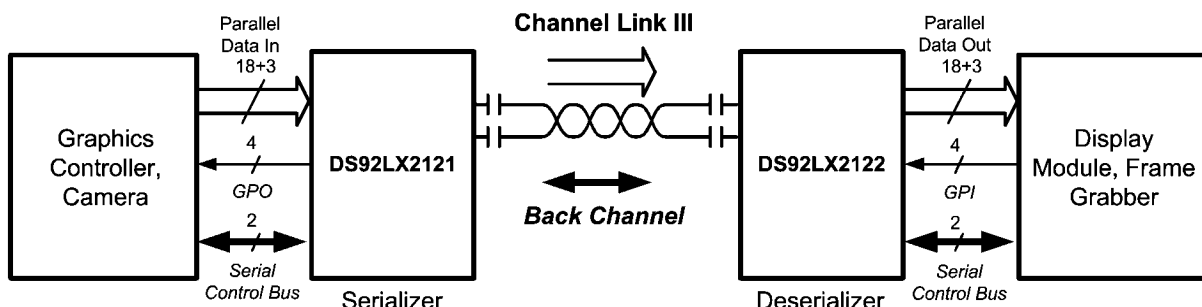


30125127

Block Diagrams

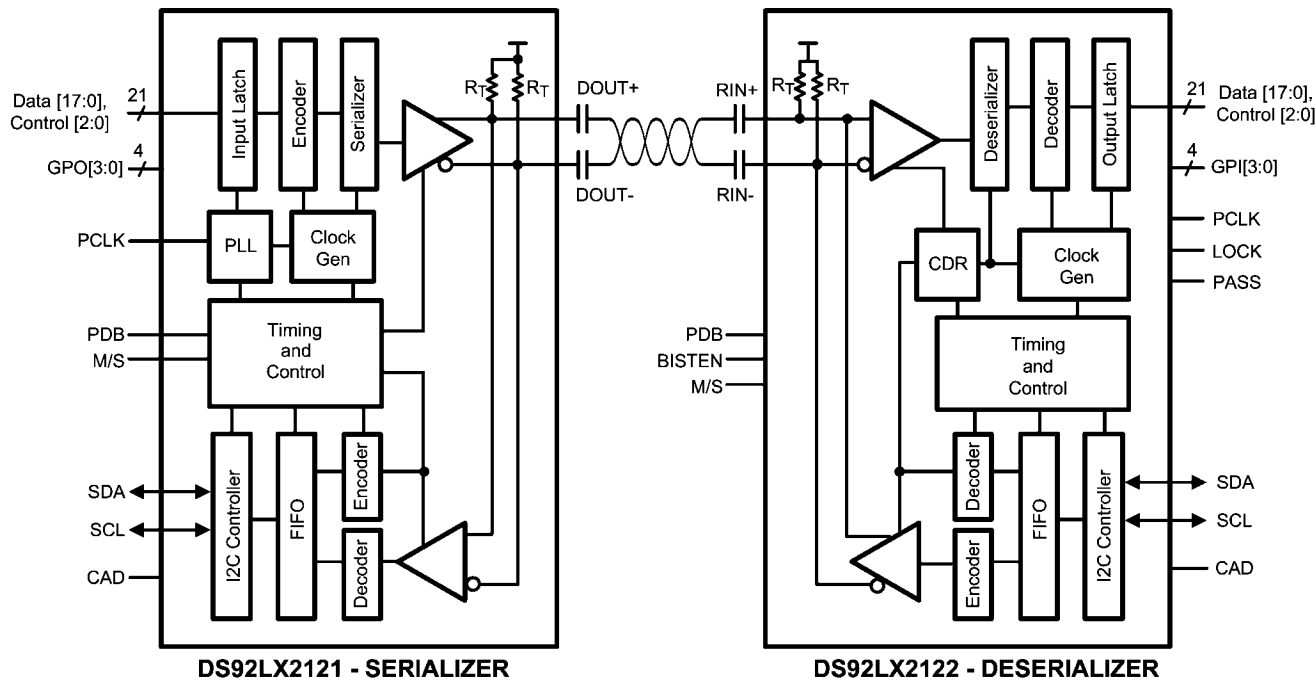

30125128


FIGURE 1. Block Diagram

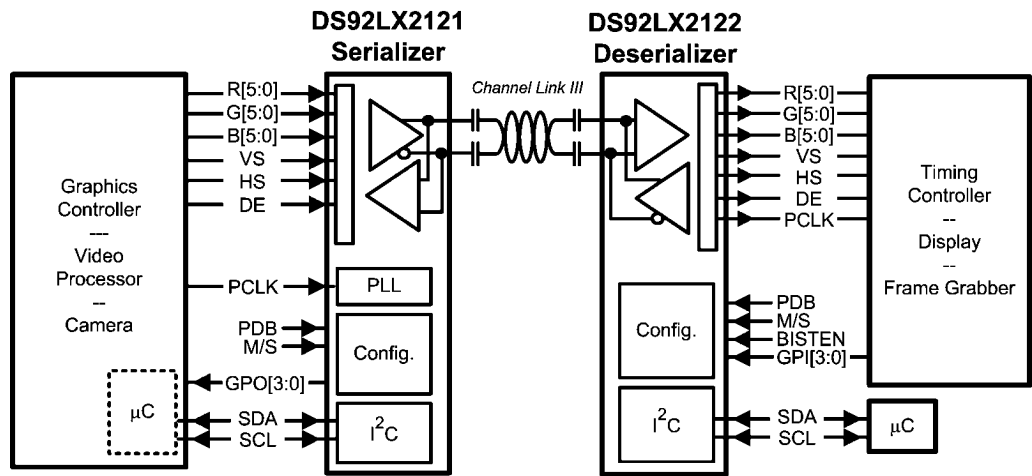

30125129

FIGURE 2. Application Block Diagram

DS92LX2121 Pin Diagram

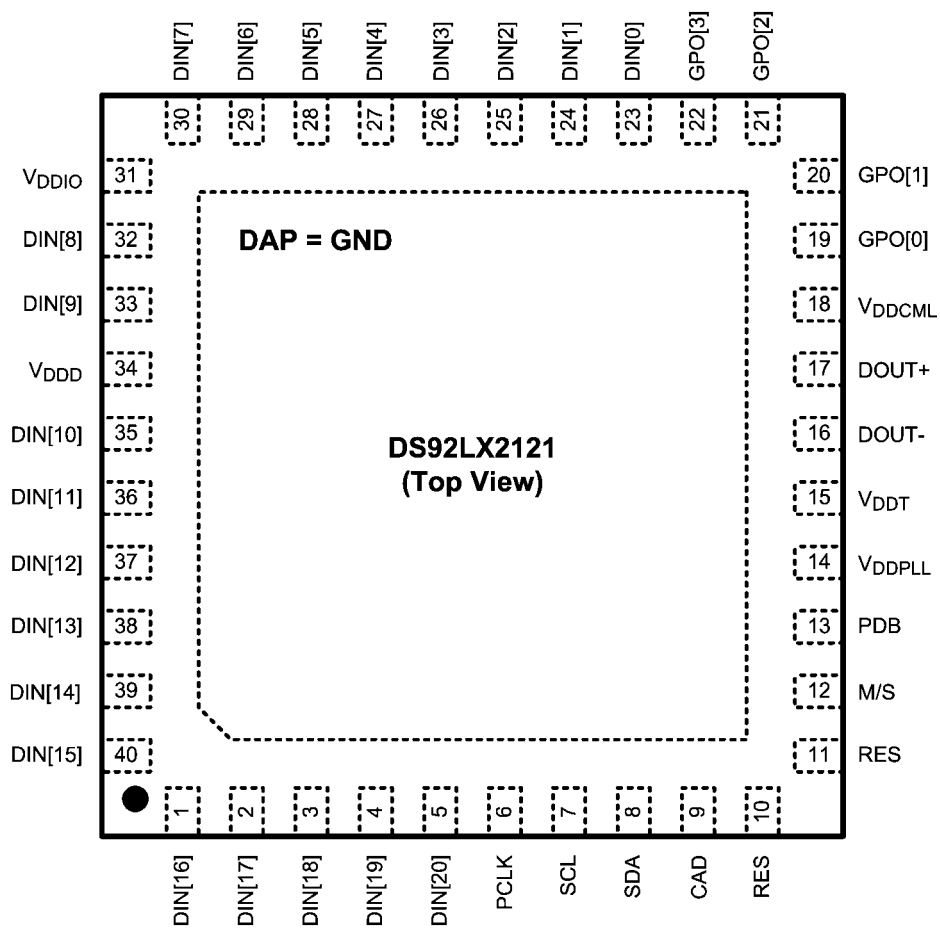


Serializer - DS92LX2121 — Top View

30125119

DS92LX2121 Serializer Pin Descriptions

Pin Name	Number of Pins	I/O, Type	Description
LVC MOS PARALLEL INTERFACE			
DIN[20:0]	21	Inputs, LVCMOS w/ pull down	Parallel data inputs.
PCLK	1	Input, LVCMOS w/ pull down	Pixel Clock Input Pin. Strobe edge set by TRFB configuration.
GENERAL PURPOSE OUTPUT (GPO)			
GPO[3:0]	4	Output, Digital	General-purpose pins individually configured as outputs; which are used to control and respond to various commands.
SERIAL CONTROL BUS - I²C COMPATIBLE			
SCL	1	Input/Output, Open Drain	Clock line for the serial control bus communication SCL requires an external pull-up resistor to V _{DDIO} .
SDA	1	Input/Output, Open Drain	Data line for the serial control bus communication SDA requires an external pull-up resistor to V _{DDIO} .
M/S	1	Input, LVCMOS w/ pull down	I ² C Master / Slave select M/S = L, Master (default); device generates and drives the SCL clock line M/S = H, Slave; device accepts SCL clock input
CAD	1	Input, analog	Continuous Address Decoder Input pin to select the Slave Device Address. Input is connect to external resistor divider to programmable Device ID address (see Serial Control Bus Connection).
CONTROL AND CONFIGURATION			
PDB	1	Input, LVCMOS w/ pull down	Power down Mode Input Pin. PDB = H, Transmitter is enabled and is ON. PDB = L, Transmitter is in Sleep (Power Down). When the transmitter is in the SLEEP state, the PLL is shutdown, and IDD is minimized.
RES	2	Input, LVCMOS w/ pull down	Reserved. This pin MUST be tied LOW.
Channel Link III INTERFACE			
DOUT+	1	Input/Output, CML	Non-inverting differential output, back-channel input.
DOUT-	1	Input/Output, CML	Inverting differential output, back-channel input.
Power and Ground			
VDDPLL	1	Power, Analog	PLL Power, 1.8V ±5%
VDDT	1	Power, Analog	Tx Analog Power, 1.8V ±5%
VDDCML	1	Power, Analog	LVDS & BC Dr Power, 1.8V ±5%
VDDD	1	Power, Digital	Digital Power, 1.8V ±5%
VDDIO	1	Power, Digital	Power for input stage, The single-ended inputs are powered from V _{DDIO} .
VSS	-	Ground, DAP	All VSS pads are down bonded to DAP. DAP must be grounded.

DS92LX2122 Pin Diagram

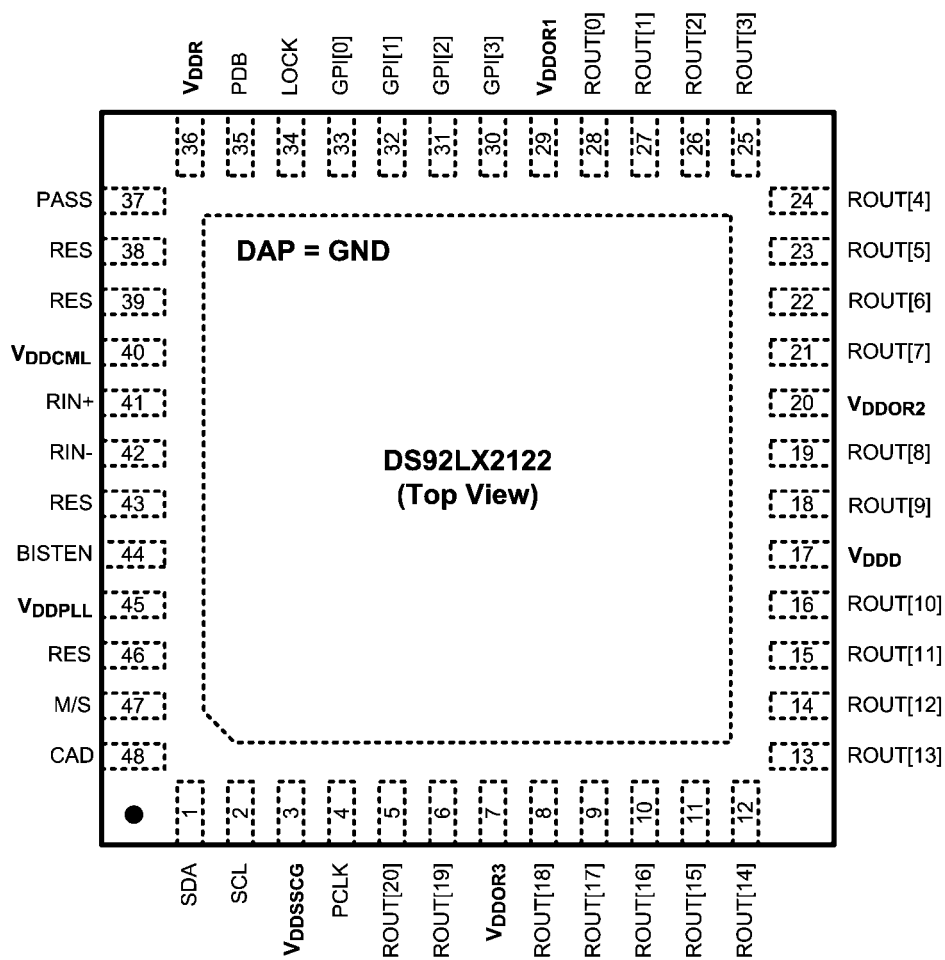

Deserializer - DS92LX2122 — Top View


30125120

DS92LX2122 Deserializer Pin Descriptions




Pin Name	Number of Pins	I/O, Type	Description
LVC MOS PARALLEL INTERFACE			
ROUT[20:0]	21	Outputs, LVC MOS	Parallel data outputs.
PCLK	1	Output, LVC MOS	Pixel Clock Output Pin. Strobe edge set by RFB configuration. In SLEEP, outputs are controlled by the OSS_SEL.
General Purpose Input (GPI)			
GPI[3:0]	4	Input/Output, Digital	General-purpose pins individually configured as inputs; which are used to control and respond to various commands.
SERIAL CONTROL BUS - I²C COMPATIBLE			
SCL	1	Input/Output, Open Drain	Clock line for the serial control bus communication SCL requires an external pull-up resistor to V _{DDIO} .
SDA	1	Input/Output, Open Drain	Data line for serial control bus communication SDA requires an external pull-up resistor to V _{DDIO} .
M/S	1	Input, LVC MOS w/ pull up	I ² C Master / Slave select M/S = L, Master; device generates and drives the SCL clock line M/S = H, Slave (default); device accepts SCL clock input
CAD	1	Input, analog	Continuous Address Decoder Input pin to select the Slave Device Address. Input is connect to external resistor divider to programmable Device ID address (see Serial Control Bus Connection)
CONTROL AND CONFIGURATION			
PDB	1	Input, LVC MOS w/ pull down	Power down Mode Input Pin. PDB = H, Receiver is enabled and is ON. PDB = L, Receiver is in Sleep (Power down mode). When the Receiver is in the SLEEP state, the LVC MOS Outputs are in TRI-STATE, the PLL is shutdown and IDD is minimized.
LOCK	1	Output, LVC MOS	LOCK Status Output Pin. LOCK = H, PLL is Locked, outputs are active LOCK = L, PLL is unlocked, ROUT and PCLK output states are controlled by OSS_SEL. May be used as Link Status.
RES	4	-	Reserved. Pin 46: This pin MUST be tied LOW. Pins 38, 39, 43: Leave pin open.
BIST MODE			
BISTEN	1	Input, LVC MOS w/ pull down	BIST Enable Pin. BISTEN = H, BIST Mode is enabled. BISTEN = L, BIST Mode is disabled.
PASS	1	Output, LVC MOS	PASS Output Pin for BIST mode. PASS = H, ERROR FREE Transmission PASS = L, one or more errors were detected in the received payload. Leave Open if unused. Route to test point (pad) recommended.
Channel Link III INTERFACE			
RIN+	1	Input/Output, CML	Noninverting differential input, back channel output.
RIN-	1	Input/Output, CML	Inverting differential input, back channel output.

Pin Name	Number of Pins	I/O, Type	Description
POWER AND GROUND			
VDDSSCG	1	Digital Power	SSCG Power, 1.8V \pm 5%
VDDOR1/2/3	3	Digital Power	TTL Output Buffer Power, The single-ended outputs and control input are powered from V_{DDIO} . V_{DDIO} can be connected to a 1.8V \pm 5% or 3.3V \pm 10%
VDDD	1	Digital Power	Digital Core Power, 1.8V \pm 5%
VDDR	1	Analog Power	Rx Analog Power, 1.8V \pm 5%
VDDCML	1	Analog Power	BC Driver Power, 1.8V \pm 5%
VDDPLL	1	Analog Power	PLL Power, 1.8V \pm 5%
VSS	-	Ground	All VSS pads are down bonded to DAP. DAP must be grounded.


Physical Dimensions inches (millimeters) unless otherwise noted

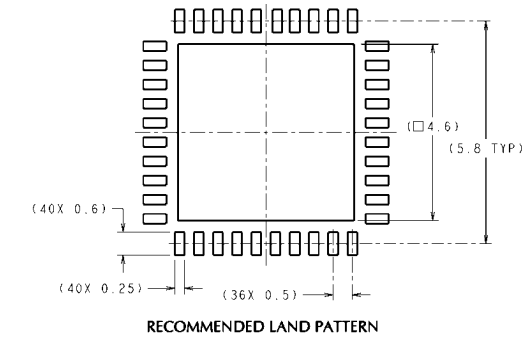



DIMENSIONS ARE IN MILLIMETERS
DIMENSIONS IN () FOR REFERENCE ONLY

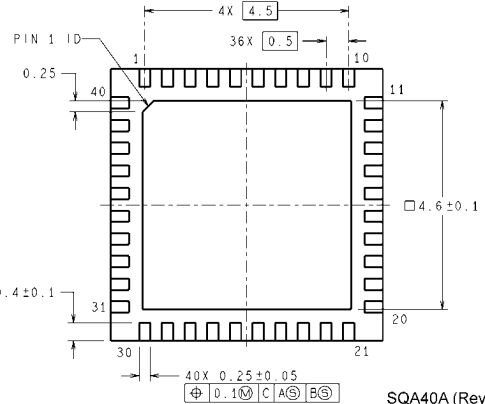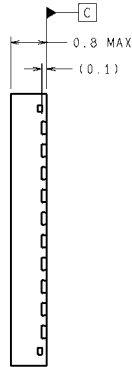

DS92LX2121 Serializer
NS Package Number SQA40A

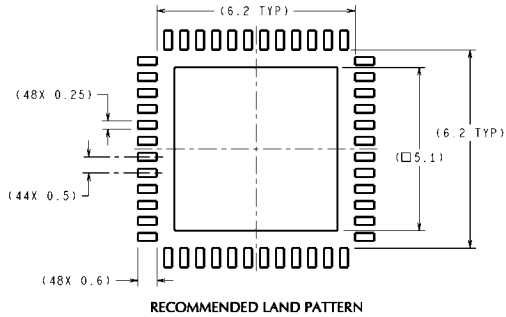

DIMENSIONS ARE IN MILLIMETERS
DIMENSIONS IN () FOR REFERENCE ONLY

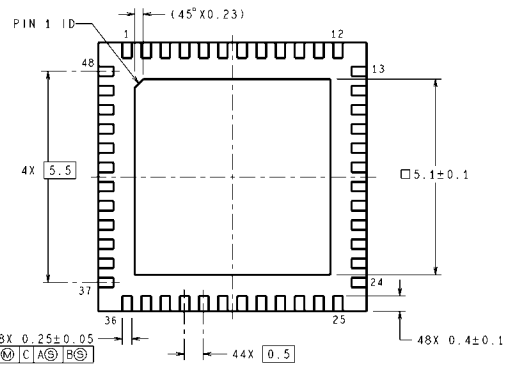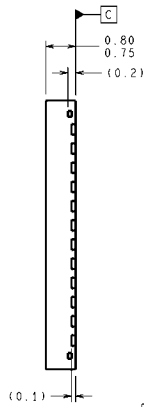

DS92LX2122 Deserializer
NS Package Number SQA48A

Notes

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH® Tools	www.national.com/webench
Audio	www.national.com/audio	App Notes	www.national.com/appnotes
Clock and Timing	www.national.com/timing	Reference Designs	www.national.com/refdesigns
Data Converters	www.national.com/adac	Samples	www.national.com/samples
Interface	www.national.com/interface	Eval Boards	www.national.com/evalboards
LVDS	www.national.com/lvds	Packaging	www.national.com/packaging
Power Management	www.national.com/power	Green Compliance	www.national.com/quality/green
Switching Regulators	www.national.com/switchers	Distributors	www.national.com/contacts
LDOs	www.national.com/ldo	Quality and Reliability	www.national.com/quality
LED Lighting	www.national.com/led	Feedback/Support	www.national.com/feedback
Voltage References	www.national.com/vref	Design Made Easy	www.national.com/easy
PowerWise® Solutions	www.national.com/powerwise	Applications & Markets	www.national.com/solutions
Serial Digital Interface (SDI)	www.national.com/sdi	Mil/Aero	www.national.com/milaero
Temperature Sensors	www.national.com/tempsensors	SolarMagic™	www.national.com/solarmagic
PLL/VCO	www.national.com/wireless	PowerWise® Design University	www.national.com/training

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2010 National Semiconductor Corporation

For the most current product information visit us at www.national.com



**National Semiconductor
Americas Technical
Support Center**
Email: support@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe
Technical Support Center**
Email: europe.support@nsc.com

**National Semiconductor Asia
Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan
Technical Support Center**
Email: jpn.feedback@nsc.com