




## ▼ Simple Drive Requirement

## ▼ Low Gate Charge

## ▼ Fast Switching




$BV_{DSS}$	-30V
$R_{DS(ON)}$	50mΩ
$I_D$	-5.3A

**Description**

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The SO-8 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

**Absolute Maximum Ratings**

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-30	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D @ T_A=25^\circ C$	Continuous Drain Current <sup>3</sup>	-5.3	A
$I_D @ T_A=70^\circ C$	Continuous Drain Current <sup>3</sup>	-4.7	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	-20	A
$P_D @ T_A=25^\circ C$	Total Power Dissipation	2.5	W
	Linear Derating Factor	0.02	W/°C
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

**Thermal Data**

Symbol	Parameter	Value	Unit
$R_{thj-a}$	Thermal Resistance Junction-ambient <sup>3</sup>	Max. 50	°C/W



## Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-30	-	-	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-5\text{A}$	-	-	50	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-4\text{A}$	-	-	90	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=-250\mu\text{A}$	-1	-	-3	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=-10\text{V}, I_{\text{D}}=-5\text{A}$	-	5	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current ( $T_j=25^\circ\text{C}$ )	$V_{\text{DS}}=-30\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-1	$\text{uA}$
	Drain-Source Leakage Current ( $T_j=70^\circ\text{C}$ )	$V_{\text{DS}}=-24\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-25	$\text{uA}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}=\pm20\text{V}$	-	-	$\pm100$	nA
$Q_g$	Total Gate Charge <sup>2</sup>	$I_{\text{D}}=-5.3\text{A}$	-	14.6	-	nC
$Q_{\text{gs}}$	Gate-Source Charge	$V_{\text{DS}}=-15\text{V}$	-	1.8	-	nC
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=-10\text{V}$	-	3.7	-	nC
$t_{\text{d(on)}}$	Turn-on Delay Time <sup>2</sup>	$V_{\text{DS}}=-15\text{V}$	-	6.6	-	ns
$t_r$	Rise Time	$I_{\text{D}}=-1\text{A}$	-	7.7	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time	$R_G=3.3\Omega, V_{\text{GS}}=-10\text{V}$	-	22	-	ns
$t_f$	Fall Time	$R_D=15\Omega$	-	9.3	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	570	-	pF
$C_{\text{oss}}$	Output Capacitance	$V_{\text{DS}}=-25\text{V}$	-	80	-	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance	f=1.0MHz	-	75	-	pF

## Source-Drain Diode

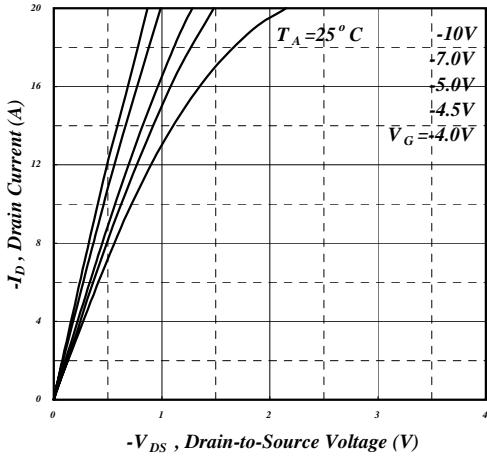
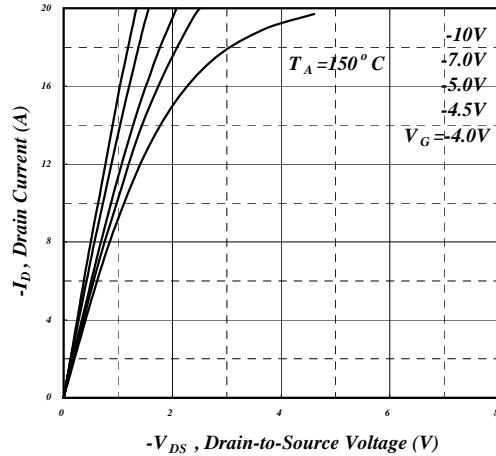
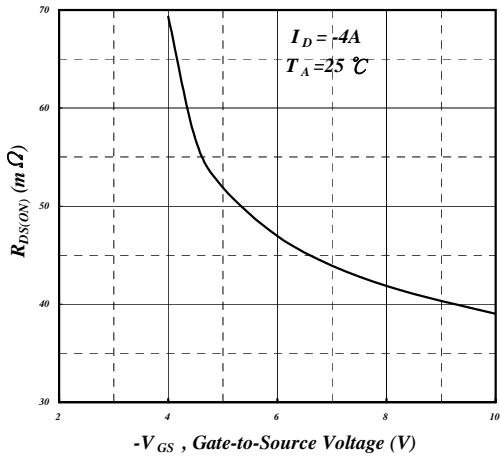
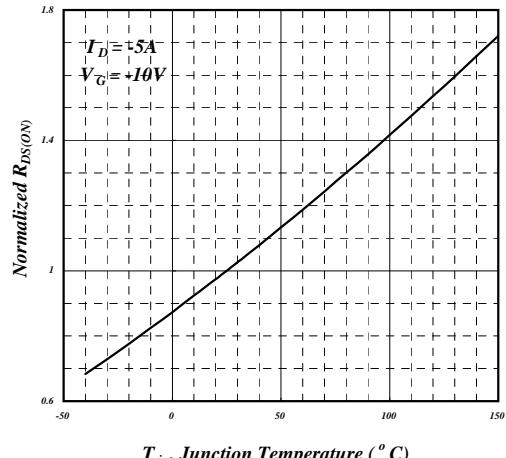
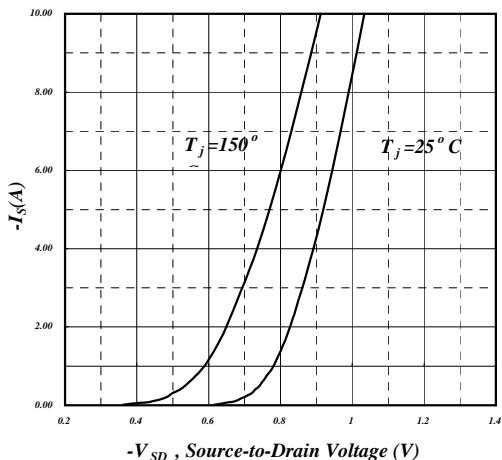
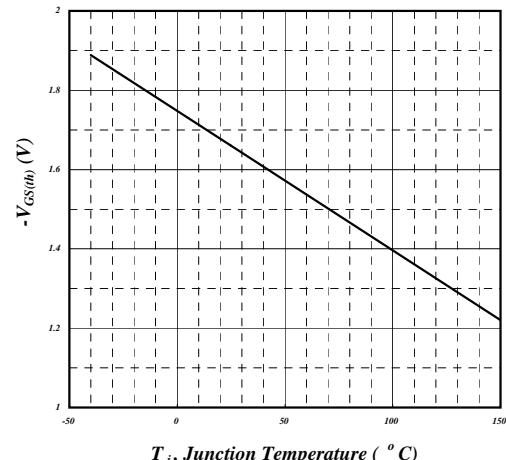
Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$I_S=-2.1\text{A}, V_{\text{GS}}=0\text{V}$	-	-	-1.2	V
$t_{\text{rr}}$	Reverse Recovery Time <sup>2</sup>	$I_S=-5\text{A}, V_{\text{GS}}=0\text{V},$ $dI/dt=100\text{A}/\mu\text{s}$	-	18	-	ns
$Q_{\text{rr}}$	Reverse Recovery Charge		-	11	-	nC

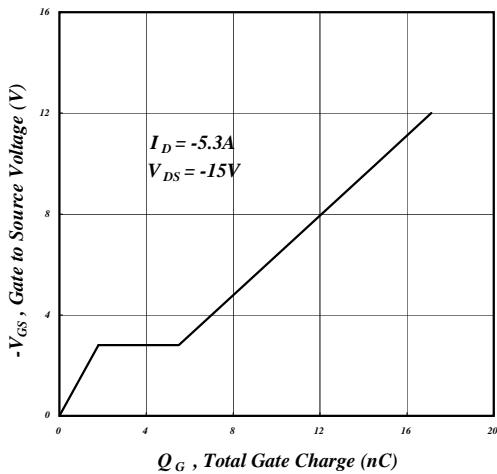
## Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board ; 125 °C/W when mounted on Min. copper pad.

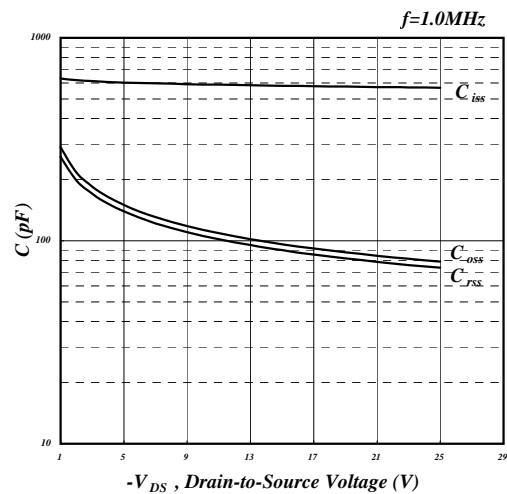
THIS PRODUCT IS AN ELECTROSTATIC SENSITIVE, PLEASE HANDLE WITH CAUTION.

THIS PRODUCT HAS BEEN QUALIFIED FOR CONSUMER MARKET. APPLICATIONS OR USES AS CRITERIAL COMPONENT IN LIFE SUPPORT DEVICE OR SYSTEM ARE NOT AUTHORIZED.

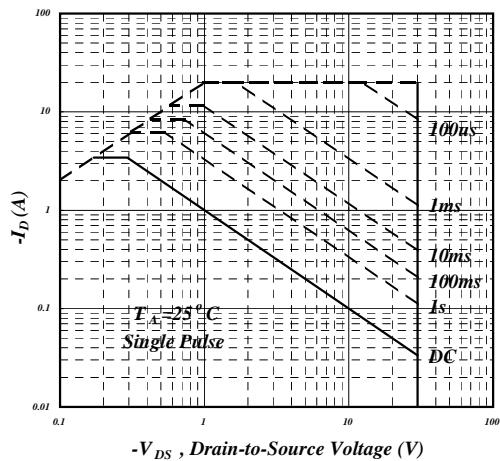

**Fig 1. Typical Output Characteristics**

**Fig 2. Typical Output Characteristics**

**Fig 3. On-Resistance v.s. Gate Voltage**

**Fig 4. Normalized On-Resistance v.s. Junction Temperature**

**Fig 5. Forward Characteristic of Reverse Diode**

**Fig 6. Gate Threshold Voltage v.s. Junction Temperature**



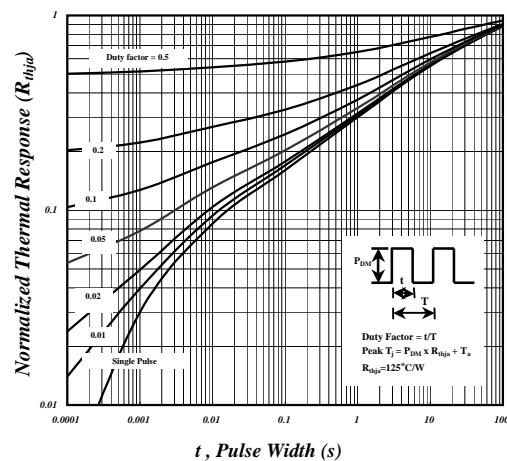
**Fig 7. Gate Charge Characteristics**



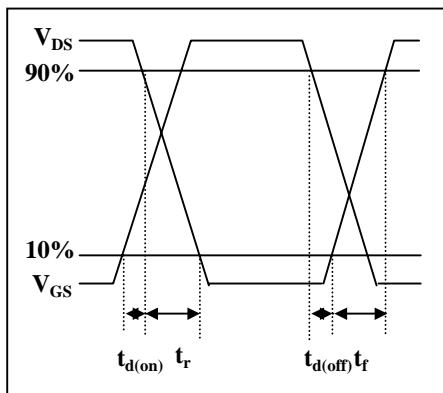
**Fig 8. Typical Capacitance Characteristics**



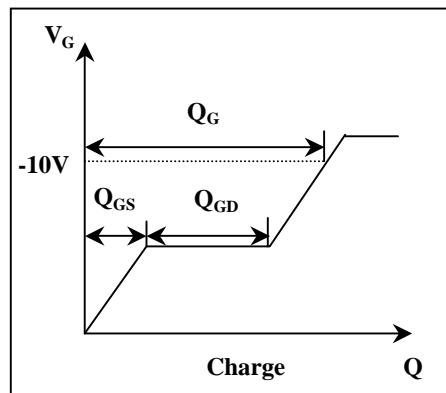
**Fig 9. Maximum Safe Operating Area**



**Fig 10. Effective Transient Thermal Impedance**



**Fig 11. Switching Time Waveform**

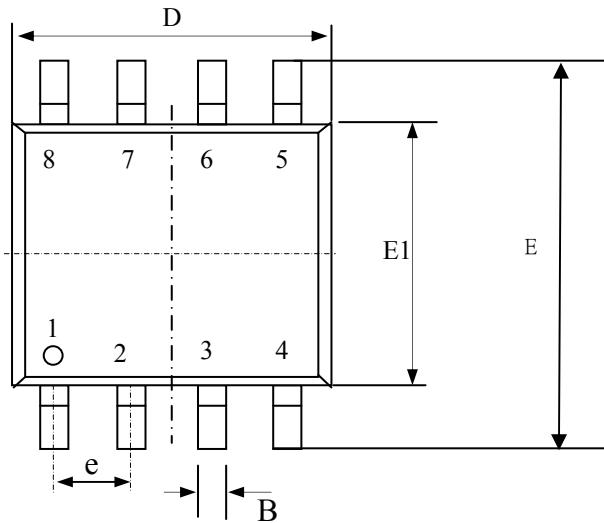


**Fig 12. Gate Charge Waveform**

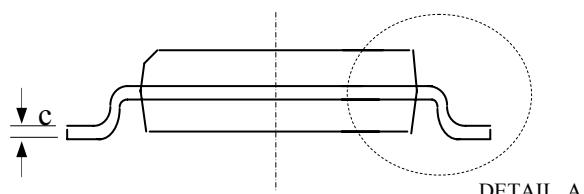
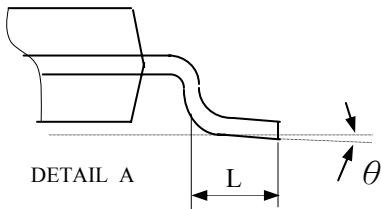
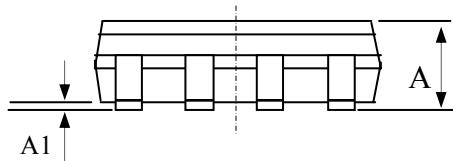


ADVANCED POWER ELECTRONICS CORP.

## Package Outline : SO-8



SYMBOLS	Millimeters		
	MIN	NOM	MAX
A	1.35	1.55	1.75
A1	0.10	0.18	0.25
B	0.33	0.41	0.51
C	0.19	0.22	0.25
D	4.80	4.90	5.00
E1	3.80	3.90	4.00
E	5.80	6.15	6.50
L	0.38	0.71	1.27
$\theta$	0	4.00	8.00
e	1.27 TYP		



1. All Dimension Are In Millimeters.

2. Dimension Does Not Include Mold Protrusions.

## Part Marking Information & Packing : SO-8

